

Now delivering
864 kbit/s


Aprisa SR+

SMART, SECURE POINT-TO-MULTIPOINT RADIO



Smart, secure, industry-leading speed licensed point-to-multipoint SCADA communications for industrial monitoring and control for the electricity, water, oil and gas industries

- **High capacity:** to meet the growing number of data-intensive applications in the SCADA environment, the Aprisa SR+ provides data rates of up to 432 kbit/s half duplex / 864 kbit/s full duplex in 100 kHz licensed channels.
- **Secure:** with its defense in depth approach, including AES encryption, authentication, address filtering and user access control including RADIUS, the Aprisa SR+ protects against vulnerabilities and malicious attacks.
- **Future-proof:** the Aprisa SR+ supports dual serial and dual Ethernet ports in a single, compact form factor, designed to cryptographically secure legacy serial, protect existing device investment, and enable new applications. Old and new application protocols can be run side by side.
- **Advanced L2 / L3 capabilities:** selectable L2 bridge, L3 router, or advanced gateway router combination L2/L3 modes with VLAN, QoS, NAT, and filtering attributes to maximize capacity in constrained bandwidth and prioritize mission critical traffic while meeting tough security and IP network policy imperatives.
- **Adaptable:** the Aprisa SR+ integrates into a range of network topologies, with each unit configurable as a master station, repeater or remote station; connect multiple RTUs / PLCs to a single radio.
- **Flexible interfaces:** the data interfaces can be configured for serial or Ethernet operation; a range of options are supported, including two serial and two Ethernet, one serial and three Ethernet, or four Ethernet ports. Support for NMEA GPS receiver option.
- **Link efficiency:** Adaptive Coding and Modulation (ACM) and forward error correction maintains the integrity of the wireless connection while an effective channel access scheme and IP routing ensures efficient transfer of data across the Aprisa SR+ network. Advanced payload and Ethernet / IP / TCP / UDP header compression.
- **Reliable and robust:** the Aprisa SR+ requires no manual component tuning and maintains its performance over a wide temperature range using full specification industrially rated components and shared Aprisa family heritage.
- **Easily managed:** an easy to use GUI supports local element management via HTTPS and remote element management over the air and SNMP support allows network-wide monitoring and control via a variety of supported third party network management systems.

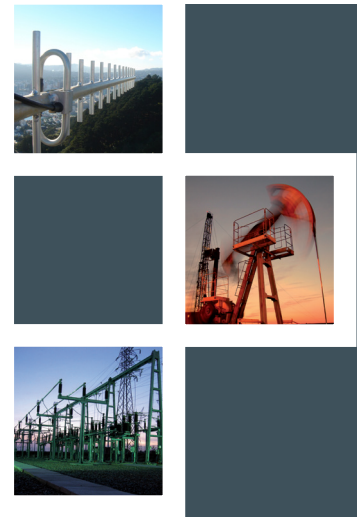

The Aprisa SR+ in brief

- 135–175, 215–240, 400–520, 757–758 and 787–788, 896–902 and 928–960 MHz
- RS-232 and IEEE 802.3 with multiple port options
- Software selectable 12.5 kHz, 15 kHz, 25 kHz, 30 kHz, 50 kHz, and 100 kHz channel sizes (frequency band dependent)
- Full and half duplex operation, single or dual frequency
- Data rates of up to 432 kbit/s half duplex / 864 kbit/s full duplex
- 256, 192 or 128 bit AES encryption
- AES-CCM to NIST SP 800-38C
- Adaptive Coding and Modulation: QPSK to 64 QAM
- Advanced forward error correction
- Ethernet and IP / TCP / UDP header compression (ROHC) and payload compression
- Software selectable dual / single antenna port operation
- Transparent to all common SCADA protocols
- Dedicated alarm port and optional GPS for radio coordinates
- Protected station and remote station options
- Power optimized option
- Layer 2 bridge (VLAN aware), layer 3 router, and advanced gateway router combination L2/L3 modes
- VLAN tagging and Q-in-Q
- Flexible QoS priority enforcement – by port or traffic type, VLAN, PCP/DSCP, rule including SMAC/DMAC, IP address and IP protocol, and EtherType
- L2 / L3 / L4 filtering
- IEEE 1613 and IEC 61850-3 substation protection
- 30 kV ESD antenna protection
- Class 1, Division 2 for hazardous protection
- –40 to +70 °C operational temperature without fans
- 210 mm (W) x 130 mm (D) x 41.5 mm (H)
- FCC and IC standards compliant

Aprisa SR+ applications

- Electricity grid: distribution automation control and protection in MV / HV distribution / transmission
- Smart grid, DA, DFA, DER, cap bank control
- Oil & Gas: production metering, lift pump automation
- AMI / AMR: high density data concentrator backhaul
- Renewables: wind farm, tidal, hydro automation
- Water and wastewater: flow, level, pressure modulation automation and pump status

SYSTEM SPECIFICATION

GENERAL						
NETWORK TOPOLOGY		Point-to-multipoint (PMP), Master, Remote, Repeater				
NETWORK INTEGRATION		Serial and Ethernet (router or bridge mode)				
PROTOCOLS						
ETHERNET		IEEE 802.3, 802.1d/q/p				
SERIAL		Legacy RS-232 transport				
WIRELESS		Proprietary				
SCADA		Transparent to all common SCADA protocols such as Modbus, IEC 60870-5-101/104, DNP3 or similar				
RADIO		FREQ BAND	TUNING RANGE		TUNE STEP	
FREQUENCY RANGE		135 MHz	135 – 175 MHz		0.625 kHz	
		220 MHz	215 – 240 MHz		0.625 kHz	
		400 MHz	400 – 470 MHz		6.25 kHz	
		(Note 4) 450 MHz	450 – 520 MHz		6.25 kHz	
		(Note 4) 700 MHz	757 – 758 & 787 – 788 MHz		6.25 kHz	
	(Note 5)	896 MHz	896 – 902 MHz		6.25 kHz	
		(Note 5) 928 MHz	928 – 960 MHz		6.25 kHz	
CHANNEL SIZE		12.5 kHz, 15 kHz, 25 kHz, 30 kHz, 50 kHz and 100 kHz software selectable				
DUPLEX		Single frequency half-duplex Dual frequency half-duplex Dual frequency full-duplex				
FREQUENCY STABILITY		± 0.5 ppm				
FREQUENCY AGING		< 1 ppm / annum				
TRANSMITTER						
MAX PEAK ENVELOPE POWER (PEP)		10.0 W (+40 dBm)				
AVERAGE POWER OUTPUT		64 QAM 0.01 – 2.5 W (+10 to +34 dBm, in 1 dB steps)				
		16 QAM 0.01 – 3.2 W (+10 to +35 dBm, in 1 dB steps)				
		QPSK 0.01 – 5.0 W (+10 to +37 dBm, in 1 dB steps)				
	(Note 2)	4-CPFSK 0.01 – 10.0 W (+10 to +40 dBm, in 1 dB steps)				
ADJACENT CHANNEL POWER		< –60 dBc				
TRANSIENT ADJACENT CHANNEL POWER		< –60 dBc				
SPURIOUS EMISSIONS		< –37 dBm				
ATTACK TIME		< 1.5 ms				
RELEASE TIME		< 0.5 ms				
DATA TURNAROUND TIME		< 2 ms				
EMISSION DESIGNATOR SUFFIX		QPSK G1D, QAM D1D				
RECEIVER		12.5 kHz	25 kHz	50 kHz	100 kHz	
SENSITIVITY (BER < 10 ⁻⁶)	max coded	64 QAM	–103 dBm	–99 dBm	–96 dBm	–93 dBm
	max coded	16 QAM	–110 dBm	–107 dBm	–104 dBm	–101 dBm
	max coded	QPSK	–115 dBm	–112 dBm	–109 dBm	–106 dBm
	min coded	4-CPFSK	–113 dBm	–110 dBm	–107 dBm	–104 dBm
ADJACENT CHANNEL SELECTIVITY		> –47 dBm > –37 dBm > –37 dBm > –37 dBm				
	(Note 1)	[> 48 dB] [> 58 dB] [> 58 dB] [> 58 dB]				
CO-CHANNEL REJECTION max coded QPSK		> –10 dB				
CO-CHANNEL REJECTION max coded 64 QAM		> –20 dB				
INTERMODULATION RESPONSE REJECTION		> –35 dBm [> 60 dB ^{Note 1}]				
BLOCKING OR DESENSITISATION		> –17 dBm [> 78 dB ^{Note 1}]				
SPURIOUS RESPONSE REJECTION		> –32 dBm [> 63 dB ^{Note 1}]				
MODEM	12.5 kHz ^(Note 3)	15 kHz	25 kHz	30 kHz	50 kHz	100 kHz
GROSS DATA RATE						
BANDS	220, 400, 450, 700, 896, 928	135 220	220, 400, 450, 896, 928 700	135	135, 220, 400, 896, 928 700	700, 896, 928
64 QAM	54 kbit/s 60 kbit/s	54 kbit/s 60 kbit/s	96 kbit/s 120 kbit/s	96 kbit/s	216 kbit/s 240 kbit/s	432 kbit/s
16 QAM	36 kbit/s 40 kbit/s	36 kbit/s 40 kbit/s	64 kbit/s 80 kbit/s	64 kbit/s	144 kbit/s 160 kbit/s	288 kbit/s
QPSK	18 kbit/s 20 kbit/s	18 kbit/s 20 kbit/s	32 kbit/s 40 kbit/s	32 kbit/s	72 kbit/s 80 kbit/s	144 kbit/s
4-CPFSK	9.6 kbit/s 9.6 kbit/s	9.6 kbit/s 9.6 kbit/s	19.2 kbit/s 19.2 kbit/s	19.2 kbit/s	38.4 kbit/s 38.4 kbit/s	76.8 kbit/s
OCC BW	10.7 kHz 12.0 kHz	10.7 kHz 12.0 kHz	19.8 kHz 24.5 kHz	19.8 kHz	43.0 kHz 48.0 kHz	88.0 kHz
FORWARD ERROR CORRECTION		Variable Reed Solomon plus convolutional code				
ADAPTIVE BURST SUPPORT		Adaptive Coding and Modulation				

FCC and IC licensed bands

Datasheet

SECURITY		
DATA ENCRYPTION		256, 192 or 128 bit AES
DATA AUTHENTICATION		CCM
INTERFACES		
ETHERNET		2, 3 or 4 port RJ45 10/100Base-T switch (specified at order)
SERIAL		2, 1 or 0 port RJ45 RS-232 (specified at order)
		Additional RS-232 / RS-485 port via USB converter (option)
MANAGEMENT		1 x USB micro type B (device port) 1 x USB standard type A (host port)
ANTENNA		2 x TNC 50 ohm female Software selectable single or dual port operation
ALARM I/O		1 x RJ45 Alarm I/O interface 2 x inputs + 2 x outputs
LEDs		Status: OK, MODE, AUX, TX, RX Diagnostics: RSSI, traffic port status
TEST BUTTON		Toggles LEDs between diagnostics / status
PRODUCT OPTIONS		
DATA PORT CONFIGURATION		2 x Ethernet ports + 2 serial ports 3 x Ethernet ports + 1 serial port 4 x Ethernet ports
POWER OPTIMIZED		Providing optimized power and sleep mode
PROTECTED STATION		Providing hot-swappable / hot-standby redundant hardware switching (13.8 VDC or 48 VDC)
GPS RECEIVER		Support for NMEA GPS receiver with radio coordinates
POWER		
INPUT VOLTAGE		10 – 30 VDC (13.8 V nominal)
RECEIVE	All bands	< 3 W (217 mA at 13.8 VDC) in active receive state
		< 2 W (145 mA at 13.8 VDC) in idle receive state
		< 0.5 W (36 mA at 13.8 VDC) in sleep mode
TRANSMIT	135 and 220 MHz	< 26 W (1884 mA at 13.8 VDC)
	400, 450, 700, 896, 928 MHz	< 28 W (2028 mA at 13.8 VDC)
MECHANICAL		
DIMENSIONS	Radio	210 mm (W) x 130 mm (D) x 41.5 mm (H) 8.27" (W) x 5.12" (D) x 1.63" (H)
	Protected Station	434 mm (W) x 372 mm (D) x 88.9 mm (H) 2 RU 17.1" (W) 14.6" (D) 3.5" (H)
WEIGHT		1.25 kg (2.81 lbs)
MOUNTING		Wall, Rack or DIN rail
ENVIRONMENTAL		
OPERATING TEMPERATURE		–40 to +70 °C (–40 to +158 °F)
HUMIDITY		Maximum 95 % non-condensing
MANAGEMENT & DIAGNOSTICS		
LOCAL ELEMENT		SSH and HTTP/S web servers with full control / diagnostics Partial diagnostics via LEDs and test button Software upgrade from PC or USB flash drive
REMOTE ELEMENT		SSH and HTTP/S over-the-air remote element management with control / diagnostics Network software upgrade over-the-air
NETWORK		SNMPv2 and SNMPv3 security support for integration with external network management systems
COMPLIANCE		
RF		FCC CFR47 Part 24 / 27 / 80 / 90 / 95 / 101 IC RSS 119 / RSS 134
	BAND	FCC ID: IC:
	135	UIPSQ135M150 6772A-SQ135M150
	220	UIPSQ215M141 6772A-SQ215M141
	400	UIPSQ400M1311 6772A-SQ400M1311
	450	UIPSQ450M140 N/A
	700	UIPSQ757M160 N/A
	896	UIPSQ896M141 6772A-SQ896M141
	928	UIPSQ928M141 6772A-SQ928M141
EMC		FCC CFR47 Part 15, EN 301 489-5, ICES-003
SAFETY		UL / EN 60950, Class 1 division 2 for hazardous locations
ENVIRONMENTAL		ETS 300 019 Class 3.4, IEEE 1613 Class 2 IEC 61850-3, Ingress Protection IP51

Notes:

- The receiver figures are shown in typical fixed interference dBm values and dB values [in brackets] relative to the sensitivity. Relative values are given for QPSK modulation and max coded FEC. Refer to the Aprisa SR+ User Manual for a complete list of modulation and coding levels.
- Please consult 4RF for availability.
- The gross data rate for the 12.5 kHz channel size varies with regulatory compliance.
- The 450 MHz and 700 MHz bands are only available for FCC.
- The receive tuning range is specified. The transmit tuning range is 896 - 960 MHz.

ABOUT 4RF

Operating in more than 150 countries, 4RF provides radio communications equipment for critical infrastructure applications. Customers include utilities, oil and gas companies, transport companies, telecommunications operators, international aid organisations, public safety, military and security organisations. 4RF point-to-point and point-to-multipoint products are optimized for performance in harsh climates and difficult terrain, supporting IP, legacy analogue, serial data applications.

Made in USA from local and imported parts.

Copyright © 2018 4RF Limited. All rights reserved. This document is protected by copyright belonging to 4RF Limited and may not be reproduced or republished in whole or part in any form without the prior written consent of 4RF Limited. While every precaution has been taken in the preparation of this literature, 4RF Limited assumes no liability for errors or omissions, or from any damages resulting from the use of this information. The contents and product specifications within it are subject to revision due to ongoing product improvements and may change without notice. Aprisa and the 4RF logo are trademarks of 4RF Limited.



For more information please contact
EMAIL sales@4rf.com
URL www.4rf.com

Version 2.4.0